

AT 480-R



4 Channel Audio Transformer



zone infrastructures.

- ▶ High Quality toroidal transformers guarantee low distortion, high bandwidth and full galvanic isolation between the audio sources and the 100V speaker lines.
- ▶ Low impedance audio inputs in removable Phoenix connectors.

- ▶ 100V line outputs on removable Phoenix connectors.

- ▶ 4x100W@100V line outputs.

- ▶ Two patch cord to connect the **AT480-R** to the DA480-R are supplied in the package.

- ▶ Half single 19" rack unit fully compatible with the InOut RM30 and FP30 rack accessories.

- ▶ **AT480-R** can be also used stand-alone.

Main Features


- ▶ **AT480-R** is a versatile and reliable multi-channel audio transformer.
- ▶ Very compact case and slim design, the best in fixed installation with very small spaces, for multi-

Technical Characteristics

Number of channels:	4
Input impedance:	4Ω
Output power:	4x100W
Output voltage:	100V
Frequency response:	90Hz - 20Hz ± 1.5dB
High-pass filter:	40Hz - 3dB
Size:	44mm (H) x 216mm (W) x 208mm (D)
Housing:	Steel case, half single 19" rack unit fully compatible with the InOut RM30 and FP30 rack accessories.
Weight:	4,4 Kg
Color:	Custom InOut dark blue



Rear Panel (Inputs/Outputs)

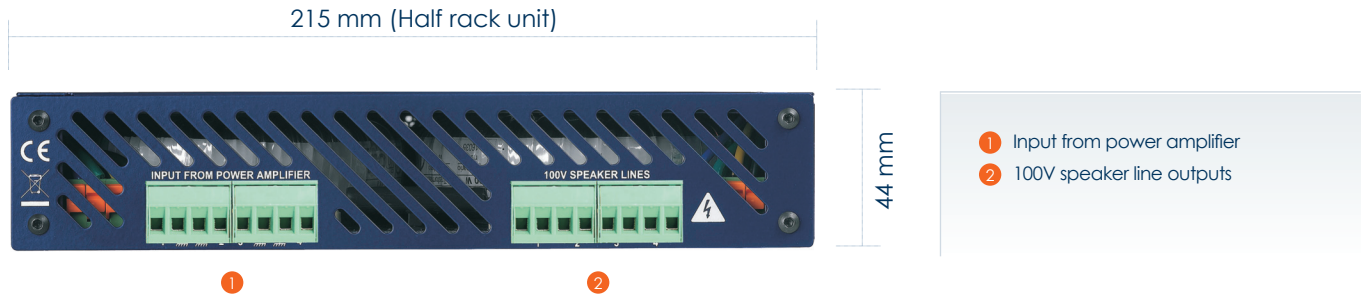

DA 480-R AT 480-R connection

